



Example of an Interferometer 3D Photograph

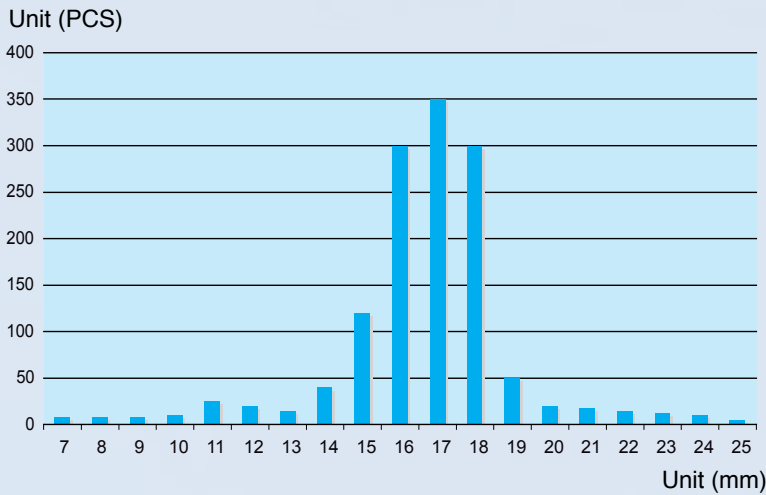


Typical Distribution Chart for Radius of Curvature

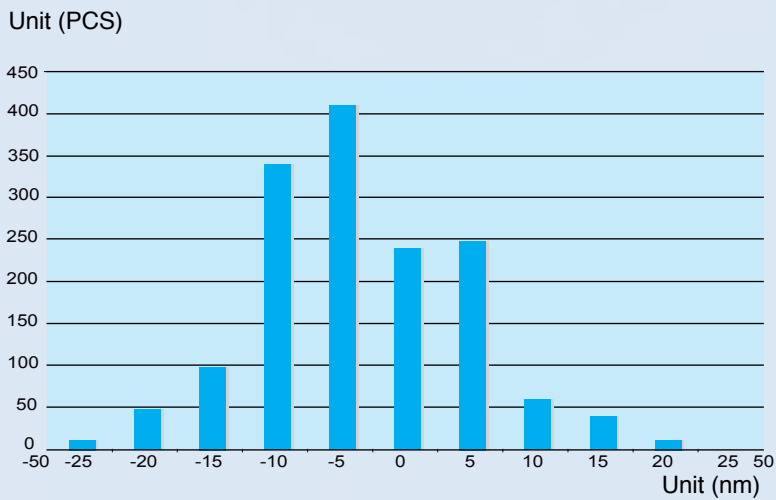


Typical Distribution Chart for Fiber Height


End Face Geometry

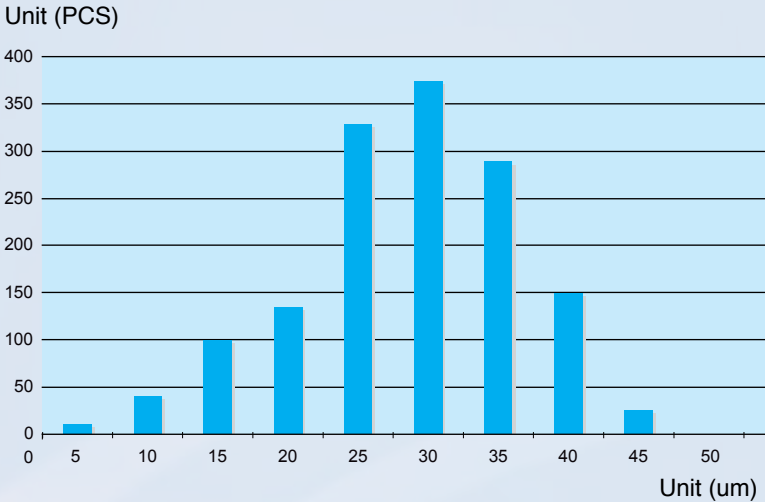

Typical Distribution Chart for Apex Offset

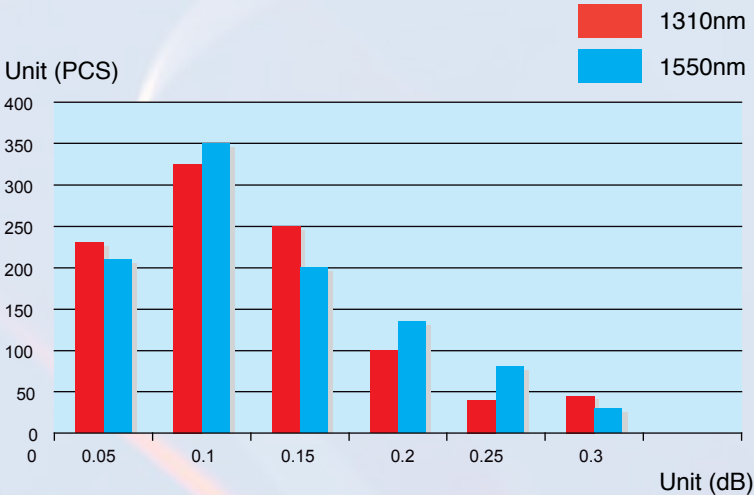

Typical Distribution Chart for Insertion Loss Measurement

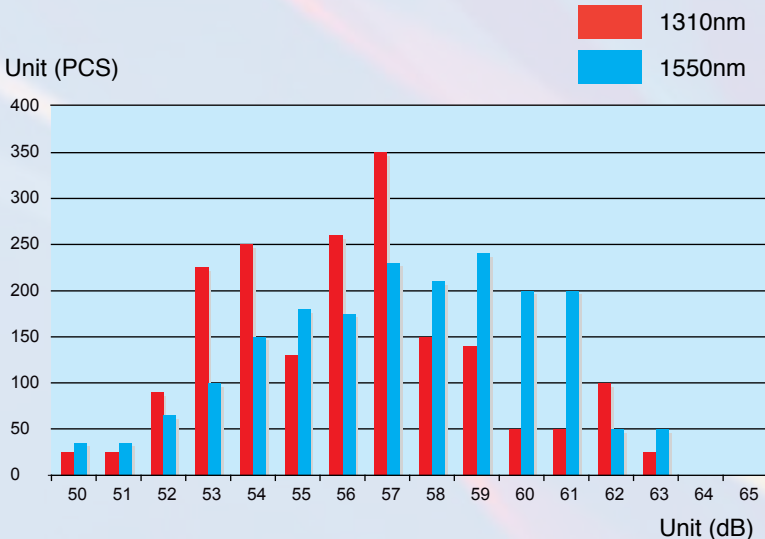

Typical Distribution Chart for Return Loss Measurement




SPECIFICATIONS

Parameters				Unit
Operating Wavelength			850,1310, 1550	nm
Insertion Loss (Typical)			0.15	dB
Return Loss Min.	Single Mode	SPC	>45	dB
		UPC	>50	dB
		APC	>60	dB
	Multi Mode	PC	>30	dB
Operating Temperature			-40 + 85	C
Conforms to Telcordia GR-326-CORE and EIA/TIA-568-B.3				


SC FEATURES/BENEFITS

- EASY PUSH-PULL INSTALLATION
- MEETS TELCORDIA GR-326 CORE REQUIREMENTS AND EIA/TIA-568-B.3
- SUITED FOR DENSITY APPLICATIONS
- PRE-RADIUS CERAMIC FERRULES CONFIGURED FOR ULTRA PC, PC, AND APC POLISHING
- UTILIZES 2.5 MM CERAMIC FERRULE
- CONNECT OPTICAL EQUIPMENT TO FIBER OPTIC CROSS CONNECTS
- INTERCONNECTS WITHIN THE TELECOM CLOSET
- LOW BACK REFLECTION


For Reference Only All Dimensions in mm (inches)

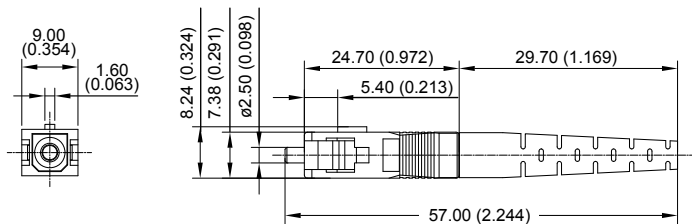

SC-UPC Single Mode Application

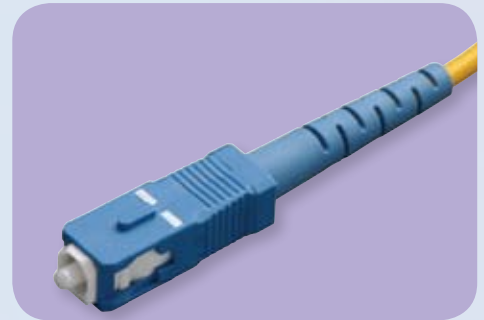

SC-PC Multi-Mode Application

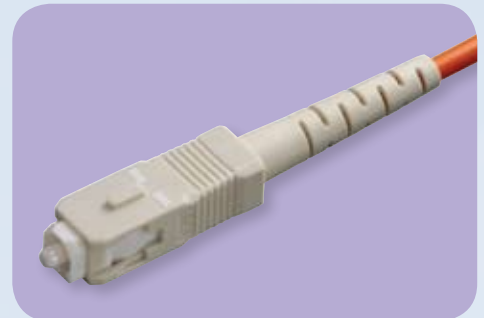

SC-APC Single Mode Application



Consult factory for adapters

Consult factory for ST, MU, DIN, MTRJ Applications



FC Connector or Patch Cord

SPECIFICATIONS

Parameters				Unit
Operating Wavelength			850,1310, 1550	nm
Insertion Loss (Typical)			0.15	dB
Return Loss Min.	Single Mode	SPC	>45	dB
		UPC	>50	dB
		APC	>60	dB
	Multi Mode	PC	>30	dB
Operating Temperature			-40 + 85	C
Conforms to Telcordia GR-326-CORE and EIA/TIA-568-B.3				

FC FEATURES/BENEFITS

- SCREWED ON MECHANISM
- MEETS TELCORDIA GR-326 CORE REQUIREMENTS AND EIA/TIA-568-B.3
- PRE-RADIUS CERAMIC FERRULES CONFIGURED FOR ULTRA PC, PC, AND APC POLISHING
- CORROSION RESISTANT BODY
- LOW BACK REFLECTION
- LOW INSERTION LOSS
- UTILIZES 2.5 MM CERAMIC FERRULE
- CONNECTS OPTICAL EQUIPMENT TO FIBER OPTIC CROSS CONNECTS
- INTERCONNECTS WITHIN THE TELECOM CLOSET AND EQUIPMENT ROOM


FC-UPC
Single Mode Application



FC-PC
Multi-Mode Application




FC-APC
Single Mode Application

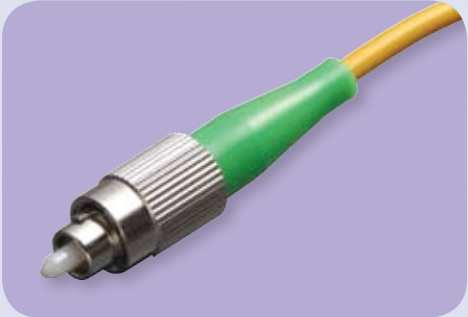

Consult factory for adapters

Consult factory for ST, MU, DIN, MTRJ Applications

For Reference Only All Dimensions in mm (inches)

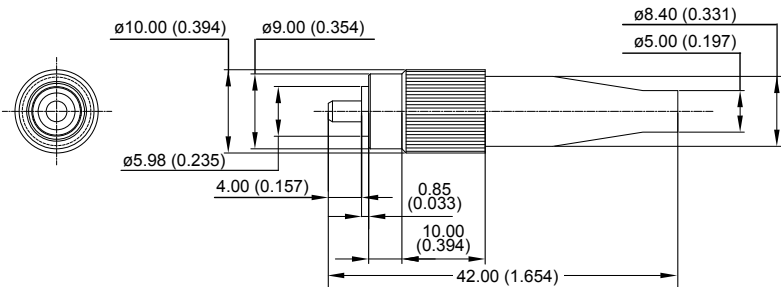


SPECIFICATIONS

Parameters				Unit
Operating Wavelength			850,1310, 1550	nm
Insertion Loss (Typical)			0.15	dB
Return Loss Min.	Single Mode	SPC	>45	dB
		UPC	>50	dB
		APC	>60	dB
	Multi Mode	PC	>30	dB
Operating Temperature			-40 + 85	C
Conforms to Telcordia GR-326-CORE and EIA/TIA-568-B.3				

LC FEATURES/BENEFITS

- PUSH AND LATCH MECHANISM
- MEETS TELCORDIA GR-326 CORE REQUIREMENTS AND EIA/TIA-568-B.3
- PRE-RADIUS CERAMIC FERRULE CONFIGURED FOR ULTRA PC, PC, AND APC POLISHING
- UTILIZES A 1.25MM CERAMIC FERRULE
- SUPPORTS INTERCONNECTIONS OF OPTICAL ROUTERS WITHIN THE TELECOM CLOSET AND EQUIPMENT ROOM
- LOW BACK REFLECTION

For Reference Only All Dimensions in mm (inches)

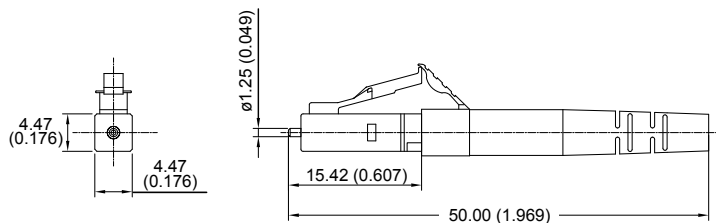

LC-UPC Single Mode Application



LC-PC Multi-Mode Application



LC-APC Single Mode Application



Consult factory for adapters

Consult factory for ST, MU, DIN, MTRJ Applications



Ordering Information

STEP 1 Connector Type	STEP 2 Polish Finish (Ref. Step1)	STEP 3 Connector Type	STEP 4 Polish Finish (Ref. Step3)	STEP 5 Fiber Mode	STEP 6 Cable Length in Meters	STEP 7 Cable Diameter	STEP 8 Core/ Cladding Diameter	STEP 9 Boot	STEP 10 RoHS Compliant per EC Directive	STEP 11 Special Options
-----------------------------	---	-----------------------------	---	----------------------	-------------------------------------	-----------------------------	---	----------------	--	-------------------------------

Step	1	2	3	4	5	6	7	8	9	10	11
Example	1	B	2	B	S	3.0	F	4	9	AA	

STEP 1 - Connector Type

- 1 - FC
- 2 - SC
- 3 - LC

STEP 2 - Polish Finish (Ref. Step1)

- A - PC (Physical Contact)
- B - UPC (Ultra Physical Contact)
- C - APC (Angle Physical Contact)
- D - SPC (Super Physical Contact)

STEP 3 - Connector Type

- 1 - FC
- 2 - SC
- 3 - LC

STEP 4 - Polish Finish (Ref. Step3)

- A - PC (Physical Contact)
- B - UPC (Ultra Physical Contact)
- C - APC (Angle Physical Contact)
- D - SPC (Super Physical Contact)

STEP 5 - Fiber Mode

- S-Single Mode
- M-Multimode

STEP 11 - Special Options

Consult Factory

STEP 10 - RoHS Compliant per EC Directive 2002/95/EC

- 0= Non AA
- AA = Compliant

STEP 9 - Boot

- 0 - No boot
- 8 - Rubber boot
- 9 - Bellcore boot

STEP 8 - Core/Cladding Diameter

- 4 - Single Mode 9/125
- 5 - Multi Mode 50/125
- 6 - Multi Mode 62.5/125

STEP 7 - Cable Diameter

- E - 2MM Jacketed Cable
- F - 2.4MM Jacketed Cable
- G - 3MM Jacketed Cable
- H - 900UM Buffer Cable

STEP 6 - Cable Length in Meters XX.X (1.0m - 99.9m)

Examples of typical cable lengths - ref. only

- | | |
|------|-------|
| 1.0M | 5.0M |
| 2.0M | 10.0M |
| 2.5M | 15.0M |
| 3.0M | |

STEP 6 Note:

* Cable Length Tolerance

Length tolerance :

Less than 1 meter:

- +0.05/-0.0 meter

Equal or Longer than 1 meter but less than 5 meter :

- +0.25/-0.0 meter.

Equal or Longer than 5 meter:

- +0.5/-0.0 meter.

Consult factory for ST, MU, DIN, MTRJ Applications
Consult factory for adapters

NORTH AMERICAN SALES OFFICES

United States, Springfield, Missouri

Factory and Sales Office 800 641 4054
Puerto Rico Sales Office 787 841 0920
Mexico Sales Office 800 872 7674
Canada Sales Office 800 327 8272

EUROPEAN SALES OFFICES

France, Auch Factory and Sales 33 (0) 5 6263 4491
Northern France Sales Office 33 (0) 1 4588 1388
Southern France Sales Office 33 (0) 4 6772 8028
Italy Sales Office 39 (0) 2 5411 6106
Germany Sales Office 49 (0) 23 5163 4739

Europe & Middle East Technical Agents:

Austria, Benelux, Denmark, Finland, Greece,
United Kingdom, Ireland, Scotland, Slovenia,
Spain, Sweden, Switzerland, Israel and Turkey

ASIA / PACIFIC SALES OFFICES

Singapore Factory, Sales and Engineering Office
Singapore +65 6842 1419
Japan +813 5812 7720
South Korea +82 31 909 8047
India +91 20 2439 4810
Taiwan +886 2 2937 8775
China +86 755 2643 7578
Shanghai
Shenzhen +86 755 2643 7578
Malaysia +60 4 644 9688
New Zealand +64 3 358 5154
Australia +61 2 4362 3477

singapore@connectpositronic.com
japan@connectpositronic.com
korea@connectpositronic.com
india@connectpositronic.com
taiwan@connectpositronic.com

shanghai@connectpositronic.com
shenzhen@connectpositronic.com

newzealand@connectpositronic.com
australia@connectpositronic.com

POSITRONIC INDUSTRIES, INC

423 N Campbell Avenue, P O Box 8247,
Springfield, MO 65801, USA
Telephone: 1 417 866 2322
Fax: 1 417 866 4115
Email: info@connectpositronic.com

POSITRONIC INDUSTRIES, SAS

Zone Industrielle Est, 46 Route d'Engachies,
F32020, Auch Cedex 9, France
Telephone: 33 (0) 5 62 63 44 91
Telecopieur: 33 (0) 5 62 63 51 17
Email: contact@connectpositronic.com


POSITRONIC ASIA PTE LTD

3014A Ubi Road 1 # 07-01 Singapore 408703
Telephone: 65 6842 1419 Fax: 65 6842 1421
Email: singapore@connectpositronic.com

www.connectpositronic.com



FIBER OPTIC



POSITRONIC INDUSTRIES

www.connectpositronic.com

