

Heat Shrinkable Adhesive Lined Polyolefin End Caps


Specification Values

PROPERTY	TEST METHOD	VALUES
Tensile Strength	ISO 37	14 MPa minimum
Ultimate Elongation	ISO 37	400% minimum
Specific Gravity	ISO 1183	1.95 maximum
Electric Strength	IEC 243	15KV/mm minimum
Corrosion (Copper Contact and Copper Mirror)	ASTM D2671	no corrosion
Water Absorption	ISO 62	0.5% maximum
Fluid Resistance	ISO 1817	
Gasoline		
Lubricating Oil		
Hydraulic Fluid		
Water		
Tensile Strength	ISO 37	8.8 MPa minimum
Ultimate Elongation		400% minimum
Fungus Resistance	ISO 846	no fungal growth

Specification References/Approvals

TYPE	SHRINKTEK
ECAP	ST6021

- Operating Temperature Range -55°C to 110°C
- Shrink Temperature 120°C
- Ideal for sealing and protecting the ends of power and telecommunication cables.

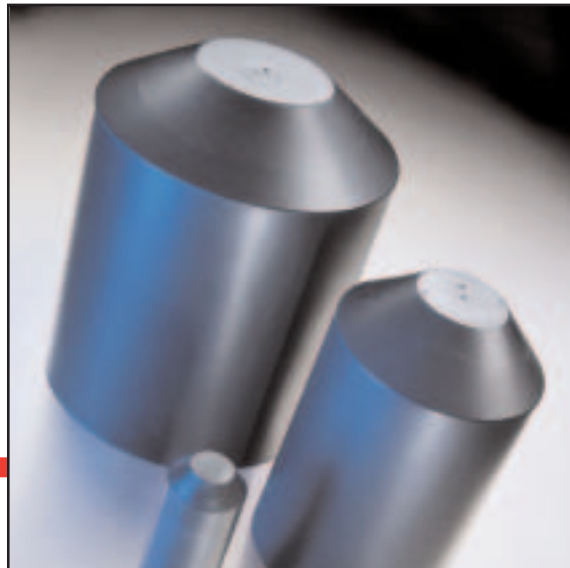

Ordering Data

ORDERING SIZE mm	MINIMUM EXPANDED DIAMETER mm	MAXIMUM RECOVERED DIAMETER mm	NOMINAL RECOVERED WALL mm	NOMINAL LENGTH mm
10/4	10	4	2.0	34
14/4.5	14	4.5	2.0	45
25/8	25	8	2.3	70
35/15	35	15	3.0	85
55/25	55	25	3.3	110
75/35	75	35	3.5	130
100/50	100	50	4.0	155
120/60	120	60	4.0	155

Standard Colours: black

Standard Packaging: Piece each

To order: specify product part number, size and colour (e.g. ECAP 25 BLK)

